

The RP Light is an attractive, versatile emergency luminaire suitable for internal environments. Comprising of a folded white epoxy powder coated zintec sheet steel base fitted with an opal diffuser. The diffuser is held in place by the two metal end caps. The gear tray is easily removable to allow first fix of the base. Cable knockouts are provided in the sides. Complying with the requirements of EN60598-2-22 and suitable for incorporation into an emergency lighting system complying with BS5266-1:2005. Available in white or special finishes.



TYPICAL APPLICATIONS

- Corridors
- Reception Areas

- Offices/Factories
- Stairwells

- Hotels

- IP40 (Interior Use)
- Steel base and sides
- Opal Diffuser
- Wall or Ceiling Mounting
- Colour Options Available
- Self-Contained
- 24V / 50V / 110V
AC / DC 8W Slave versions

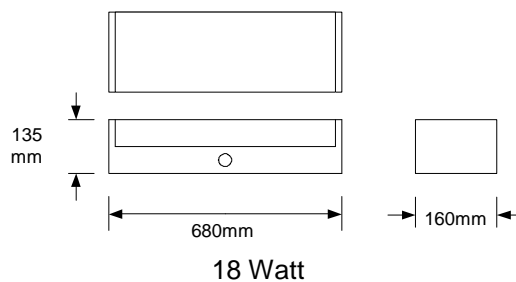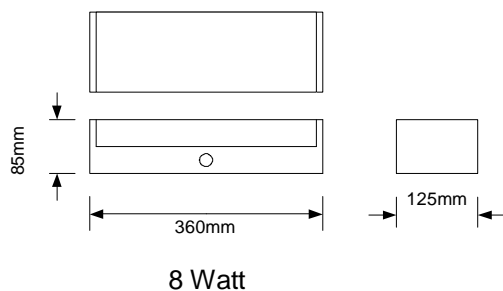

	Mode	Lamp Type	Power Con	Battery	Duration	Weight	Emerg Output	Dimensions
RP8NM	Non Maintained	8W T5	8 VA	2.4V 4Ah	3 Hours	1.4 Kg	100 Lumens	360 x 125 x 85
RP8M	Maintained	8W T5	20 VA	2.4V 4Ah	3 Hours	1.75 Kg	100 Lumens	
RP8S	Sustained (Combined)	8W T5 (two of)	20 VA	2.4V 4Ah	3 Hours	1.75 Kg	100 Lumens	
RP8/SL/*	Mains or Slave	8W T5	7 - 20 VA			1.2 – 1.5 Kg	270 Lumens	
Please suffix voltage required i.e. 24, 50, 110, 230 /ST - Self Test								
RP18NM	Non Maintained	18W T5	9 VA	3.6V 4Ah	3 Hours		200 Lumens	680 x 160 x 135
RP18M	Maintained	18W T5	38 VA	3.6V 4Ah	3 Hours		200 Lumens	