


ZAS2 Addressable Securetone Sounder II



A new low profile addressable sounder with much improved alarm current allowing up to 64 combinations of sounder/beacon to be powered.

The Securitone Micro sounder is addressed via 8 way dip-switch and compatible with all Zeta Analogue Addressable panels.

The combined sounder/beacon models have incorporated short circuit isolator built-in.

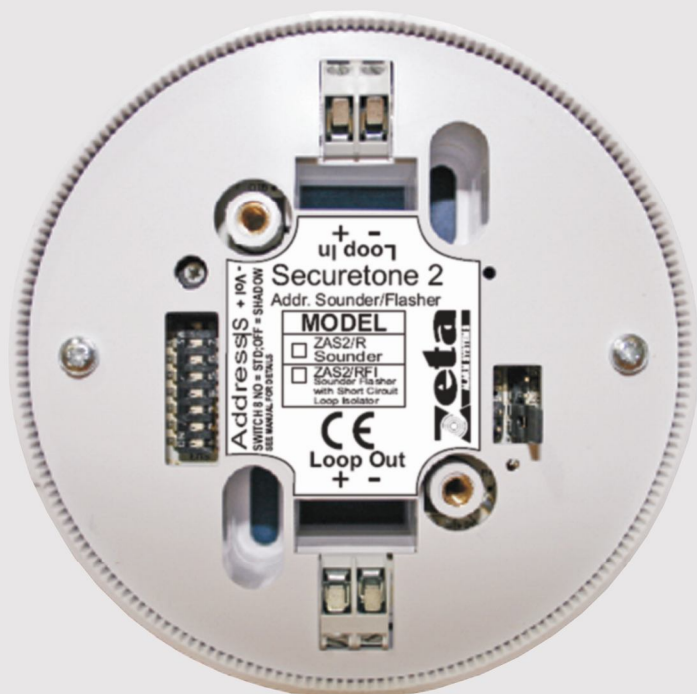

Model	ZAS2/R	ZAS2/W	ZAS2/RFI	ZAS2/WFI
Part No.	42-520	42-521	42-525	42-526
Colour	Red	White	Red	White
Sound Output	84dB@ 1 Metre			
Operating Voltage	17 - 33V DC			
Quescent Current	1.2mA			
Alarm Current	4.0mA		6.5mA	
Short Circuit Isolator	NO		YES	
Max No. Per Loop	64		64	
Frequency	Intermittent Tone: 800 (0.5 Sec) to 970 Hz (0.5 Sec) Pulsed Tone : 970 Hz (0.5 Sec on, 0.5 Sec off)			
Max Cable Size	2.5mm ²			
Operating Temp	0°C to 40°C			
Max Humidity	95% RH Non - Condensing			
IP Protection Rating	IP43			
Material	White/Red ABS - transparent PC FR rating 94Vo			
Dimensions	100mm (D) x 37.5 (H)			
Weight	120 grams			