

Push Pad Emergency Exit Hardware - EN179:2008

SED994

Push Pad Emergency Bolt

Push pad vertical emergency bolt with the following features:

- Universal for left and right hand applications
- Tested for use on Fire Doors to EN1634-1
- Optional hold-back facility available (see conditions on page 20)
- Can be cut down on site suitable for doors up to 2500mm high
- Adjustable top/bottom shoots with ± 5 mm of adjustment
- Anti thrust device to prevent shoot bolt being forcibly retracted
- Supplied with easy clean socket and flat plate keep
- 240 hour salt spray tested
- Range of accessories (see page 17/18)
- Supplied with fixings for timber doors



Top shoot with standard top trip release



Bottom shoot with standard easy clean socket



Bottom shoot with flat plate




Finishes

SE Powder coated silver (as standard)
SC Satin Chrome plated

Vertical emergency bolts

Product ref:	Description	EN179 Classification Code	Fire Door Performance			
			With OAD		Without OAD	
			Timber	Steel	Timber	Steel
SED994/SE	Emergency bolt - silver	376B1442BA	1hr	TBC	2hr	4hr
SED994/SC	Emergency bolt - satin chrome	376B1442BA	1hr	TBC	2hr	4hr
SED994/SE/HB	Emergency bolt with hold-back - silver	376B1442BA	1hr	TBC	2hr	4hr
SED994/SC/HB	Emergency bolt with hold-back - satin chrome	376B1442BA	1hr	TBC	2hr	4hr

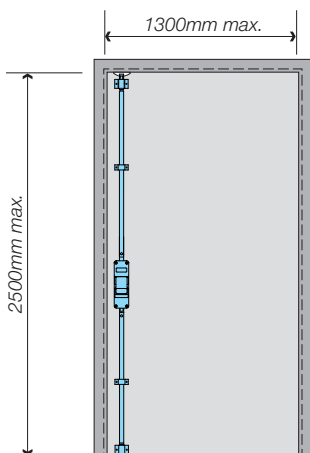

LH application shown

