

Securefast SED991 Push Bar Panic Latch

Certified to EN1125:1997 + 2000:A1

Fire Rated for Timber and Steel Doors EN1634-1

Suitable for Single Doors and the Active Leaf (1st Opening) of Rebated Double Doors

Supplied Left or Right Hand, but can be reversed on site

Supplied with a cast keep for Single and Rebated Double Door applications – The keep can be surface mounted or morticed into the frame for a single door application.

Available with Manual Hold Back (not to be used on Fire Doors unless the door has been fire tested with unlatched hardware)

Can be used with a Rim Cylinder, Digital Code Lock or Outside Access Device fitted on the outside of the door.

The slave unit can be supplied with a Micro Switch for linking to an Access Control System.

Suitable for door 1300mm wide and 2500mm high

Securefast SED992 Push Bar Panic Bolt

Certified to EN1125 : 2008

Fire Rated for Timber and Steel Doors

Suitable for Single Doors and the Inactive Leaf (2nd Opening) of Rebated Double Doors

Universal for Left and Right Hand Doors - Handing can be change to suit an Outside Access Device

Adjustable Top and Bottom Shoot bolts, offering + or – 5mm of adjustment

Available with Manual Hold Back (not to be used on Fire Doors unless the door has been fire tested with unlatched hardware)

Anti-thrust device to prevent the shoot bolt from being retracted.


Supplied with an easy clean socket

The Slave unit can be supplied with a Micro Switch for linking to an Access Control System.

Suitable for door 1300mm wide and 2500mm high

Individual Weight 4.8kg

SED991/SE/RH
Right Hand illustrated

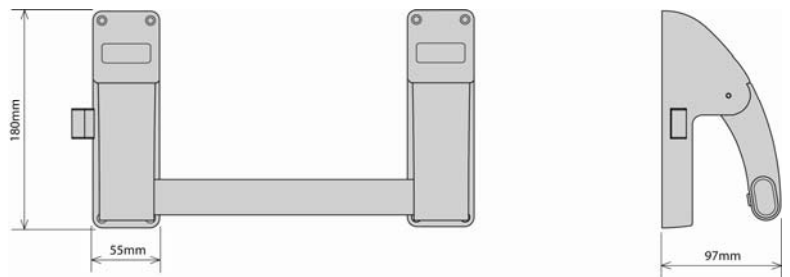

SED992/SE
Right Hand illustrated

