

Push Bar Panic Exit Hardware - EN1125:2008

SED991

Push Bar Panic Latch

Push bar single point panic latch with the following features:

- Supplied as Left Hand or Right Hand but can be reversed on-site
- Tested for use on Fire Doors to EN1634-1
- Optional hold-back facility (see page 20 for conditions of use)
- Can be cut down on site suitable for doors up to 1300mm wide
- Universal Keep for single doors and rebated double door applications. Keep can be surface mounted or morticed into a timber frame on single door applications
- Supplied with fixings for timber doors
- Can be fixed with self tapping screws
- Optional Microswitch can be concealed in the slave unit to integrate with an access control system
- 240 hour salt spray tested
- Range of accessories (see pages 17/18)


Universal keep - surface mounted



Universal keep morticed into frame



Optional Hold-Back function housed beneath arm of mechanism unit

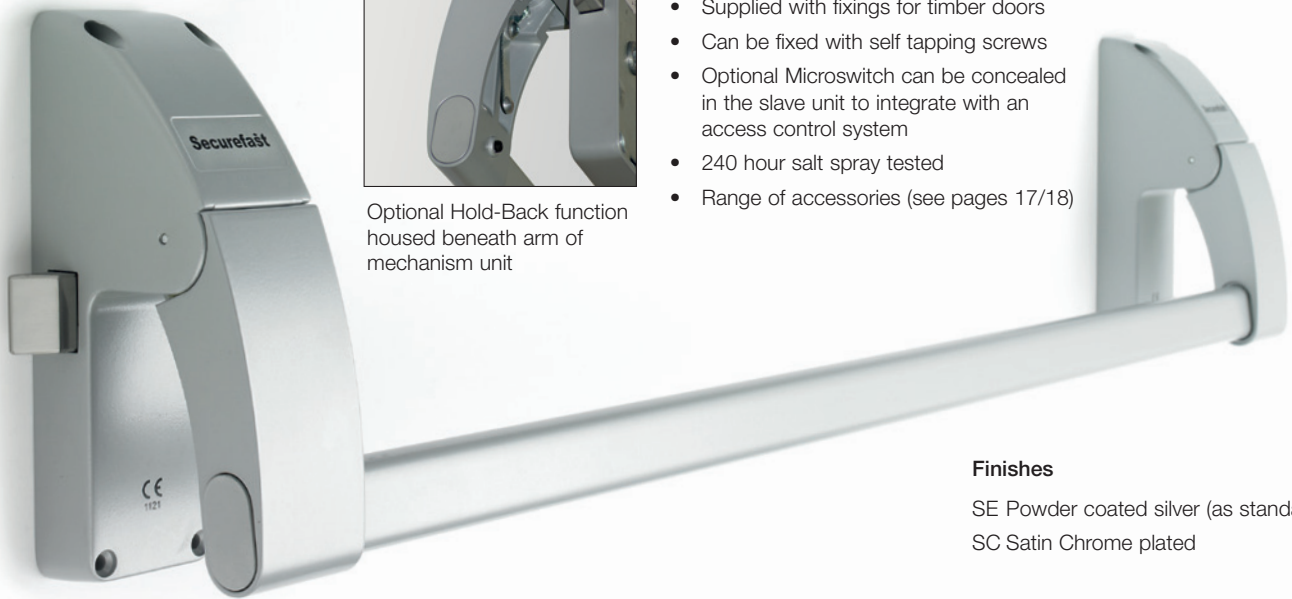


Finishes

- SE Powder coated silver (as standard)
- SC Satin Chrome plated

Single panic latch

Product ref:	Description	EN1125 Classification Code	Fire Door Performance			
			With OAD		Without OAD	
			Timber	Steel	Timber	Steel
SED991/SE	Panic latch - silver	376B1422AA	1hr	TBC	2hr	4hr
SED991/SC	Panic latch - satin chrome	376B1422AA	1hr	TBC	2hr	4hr
SED991/SE/HB	Panic latch with hold back - silver	376B1422AA	1hr	TBC	2hr	4hr
SED991/SC/HB	Panic latch with hold-back - satin chrome	376B1422AA	1hr	TBC	2hr	4hr

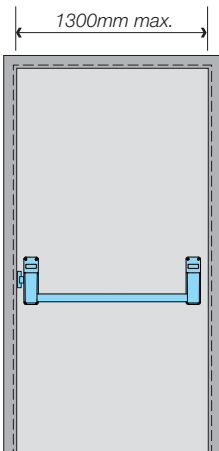

LH application shown

