

Push Bar Panic Exit Hardware - EN1125:2008

Top shoot with standard top trip release



SED992

Push Bar Panic Bolt

Push bar activated double vertical bolt with the following features:

- Universal for left and right hand applications
- Tested for use on Fire Doors to EN1634-1
- Optional hold-back facility available
- Can be cut down on site suitable for doors up to 1300mm wide and 2500mm high
- Adjustable top/bottom shoots with ± 5 mm of adjustment
- Anti thrust device prevents shoot bolt being forcibly retracted
- Supplied with easy clean socket and flat plate keep
- Optional Microswitch can be concealed in the slave unit to integrate with an access control system
- 240 hour salt spray tested
- Range of accessories (see pages 17/18)
- Supplied with fixings for timber doors



Bottom shoot with flat plate

Bottom shoot with standard easy clean socket




Finishes

SE Powder coated silver (as standard)
SC Satin Chrome plated

Vertical panic bolts

Product ref:	Description	EN1125 Classification Code	Fire Door Performance			
			With OAD		Without OAD	
			Timber	Steel	Timber	Steel
SED992/SE	Panic bolt - silver	376B1422AA	1hr	TBC	2hr	4hr
SED992/SC	Panic bolt - satin chrome	376B1422AA	1hr	TBC	2hr	4hr
SED992/SE/HB	Panic bolt with hold back - silver	376B1422AA	1hr	TBC	2hr	4hr
SED992/SC/HB	Panic bolt with hold back - satin chrome	376B1422AA	1hr	TBC	2hr	4hr

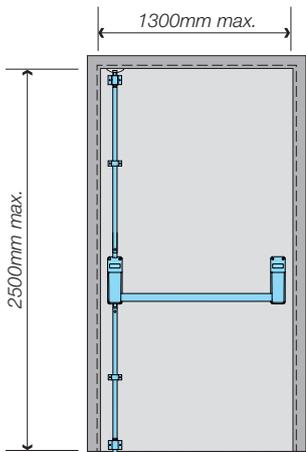

LH application shown

