

Compliance Made Easy

DorMag Pro

DorMag Pro is a wireless fire door magnet that holds open fire doors legally, allowing them to automatically disengage when an alarm is activated.



Overview


DorMag Pro is controlled by ProHub, so it's not affected by background noise.

ProHub is directly connected to the fire panel, offering the highest level of compliance for your building.

Features


- Remote monitoring via Site Manager software
- Suitable for high-risk zones, including corridors, stairwells, and kitchens
- Expandable system - add new Pro units at any time
- Flexible fitting options

DorMag Pro unit

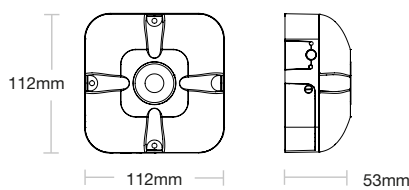

| | |
|--------|-------|
| Length | 112mm |
| Width | 112mm |
| Depth | 53mm |

Door Keeper

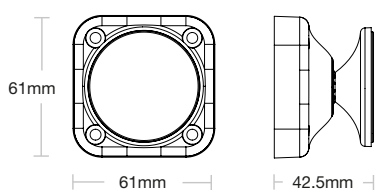

| | |
|--------|--------|
| Length | 61mm |
| Width | 61mm |
| Depth | 42.5mm |

Specification Overview

| | |
|--|---|
| Power | 4.5V Li/FES2 battery pack |
| Colour | Black with silver band |
| Warranty | 2 years |
| Casing | ABS / ABS+PC plastic |
| Installation position (DorMag Pro) | On the wall adjacent to the door, with the DorMag Pro magnet fully centered with the keeper plate |
| Installation position (Door Keeper) | Anywhere on the back of the door (minimum of 650mm from hinge) |
| Maximum door to wall depth (when door is fully opened, adjacent to the wall) | 95mm (keeper chain or floor bracket required for greater distances) |
| Maximum door to wall angle (when door is fully opened adjacent to the wall) | 25° |
| Maximum door size | Power size 5 (max of 100kg and 1250mm width) |
| Activation | Radio signal (433-434 MHz) |
| Weight | 0.52kg |
| Radio range | Typical internal range 30-40m |
| Audible warning | Yes |
| Fire rating | DorMag has been tested to EN1634-1 on FD30 doorsets, exposed and unexposed faces |
| Compliant to | EN1155:1997+A1:2002, EN1634-1:2008, EMC Directive, Radio Equipment Directive, UN 38.3 Lithium certification, CE Marked, UKCA Marked |
| Classification | Critical (Category A) installations under BS 7273-4:2015+A1:2021 |
| Part number | 448-1259 DorMag Pro |