


RF Radio Module

MODEL		WARRANTY
FHN600RF	RF-link module for Firehawk mains alarms	6YEARS

- Low power consumption
- Wirelessly interlink up to 15 RF devices
- Smart wireless - When one alarm sounds in the system, all alarms sound
- For use with FireHawk Mains Smoke and Heat Alarms & compatible with Firehawk Wireless Battery Alarms including Hearing Impaired System.

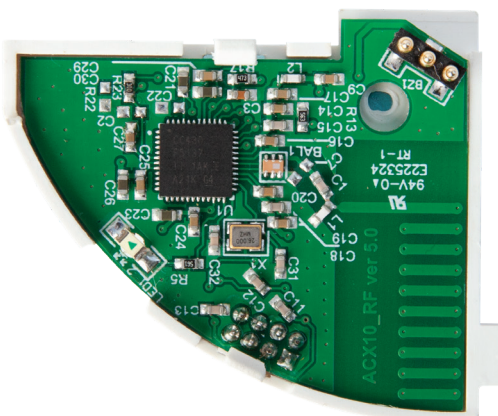

For use with FireHawk Mains Smoke and Heat Alarms



TECHNICAL SPECIFICATION	
Key features	Quick and easy to install and connect
For use in	Mains Smoke Alarms FHN250BB/RB and Mains Heat Alarms FHB450BB/RB
Mains alarms fitted with FHN600RF module are:	Compatible with the FireHawk RF-LINK range of Smoke Alarms (FHB10-RF), Heat Alarms (FHH10-RF), CO Alarms (CO10-RF), RF-Link Module for Mains Alarms (FHN600RF) and the Hard of Hearing Alarm (FHN800HIA)
Maximum interlinked alarms	20 x RF-LINK alarms (Maximum of 15 if used with FHN800HIA)
Supply Voltage	3.2V DC
Operating frequency	868MHz
Dimensions	46mm(L) x 40mm(W) x 12.5mm(H)
Weight	6g
Range	30m (120m in open air)
Packaging	Individual box & outer carton (recyclable cardboard)
Barcode	EAN - 5055278500849
Independently tested to	ETSI EN 300 220-2 V2.4.1, ETSI EN 301 489-1 V1.9.2, ETSI EN 301 489-3 V1.6.1
Warranty	6 years

Compatible with these FireHawk alarms:



HARD OF HEARING ALARM
FHN800HIA



SMOKE ALARM
FHB10-RF



HEAT ALARM
FHH10-RF



CO ALARM
CO10-RF