

Dräger Oxyboks K 25

An ergonomically designed oxygen self-rescue device that users can carry with them at all times.



DRÄGER OXYBOKS K 25

The Dräger Oxyboks K 25 has been specifically designed for use in areas where working conditions are particularly difficult, for example in the mining industry. It offers protection against the sudden and unexpected presence of toxic gases and / or oxygen deficiency.

The Dräger Oxyboks K 25 is belt-mounted and extremely robust, sitting comfortably on the wearer's hip with little or no interference with daily duties. When called upon in an emergency, the device is easily opened and donned and can be worn safely with additional forms of personal protective equipment, such as head protection. The device comes equipped with a mouthpiece, noseclip and, as an option, goggles, and allows maximum freedom of movement during usage, even when it is not possible to stand upright, such as when passing

through narrow exits. An integrated starter cartridge ensures oxygen supply is delivered immediately upon donning and the device continues to supply effective respiratory protection for periods of up to 25 minutes.

Advantages for the User

- A colored service indicator allows the user to determine at a glance whether or not the device is ready for use.
- Approved in accordance with DIN EN 13794.
- Appropriate training devices are available.
- Can be used up to temperature class 2.
- Stainless steel reinforced casing for increased robustness.
- Correctly stored devices need not be maintained or serviced for 10 years.



Dräger Oxyboks K 25



Dräger Oxyboks K 25 opened

ORDER INFORMATION

Dräger Oxyboks K 25	63 03 666
Dräger Oxyboks KT (training device)	63 03 466
Protective goggles	63 03 670
Belt	67 33 934

TECHNICAL DATA

Dräger Oxyboks K 25

Weight

- Including carry case
- During use

Dimensions (W x H x D)

Oxygen supply available

Usage period

- Breathing rate 10 L/min
- Breathing rate 30 L/min
- Breathing rate 35 L/min
- Breathing rate 100 L/min

Breathing resistance

- At breathing rate of 35 L/min sinusoidal at start of usage period
- At breathing rate of 35 L/min sinusoidal during usage period

CO₂-content

- In inhaled air
- In inhaled air during use

Breathing bag capacity

Nominal exposure time, according to EN 13794

4.6297 lb / 2.1 kg

2.6455 lb / 1.2 kg

7.44 x 8.07 x 3.5 inch / 189 x 205 x 89 mm

Immediately, from the starter cartridge

120 minutes

30 minutes

25 minutes

8 minutes

4 mbar


max. 10 mbar

< 1 Vol.%

max. 2.5 Vol.%

> 6 L

25 minutes

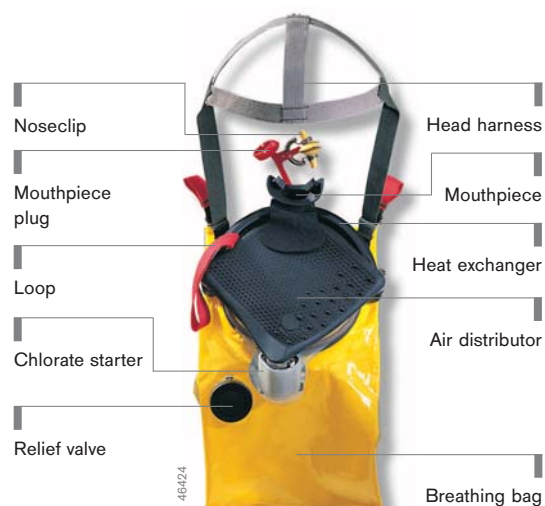

HEADQUARTERS:

Dräger Safety AG & Co. KGaA
Revalstrasse 1
23560 Lübeck, Germany

www.draeger.com

SUBSIDIARIES:

AUSTRALIA

Draeger Safety Pacific Pty. Ltd.
Axxess Corporate Park
Unit 99, 45 Gilby Road
Mt. Waverley. Vic 3149
Tel +61 3 92 65 50 00
Fax +61 3 92 65 50 95

CANADA

Draeger Canada Ltd.
7555 Danbro Crescent
Mississauga,
Ontario L5N 6P9
Tel +1 905 821 89 88
Fax +1 905 821 25 65

P. R. CHINA

Beijing Fortune Draeger
Safety Equipment Co., Ltd.
A22 Yu An Rd, B Area,
Tianzhu Airport Industrial
Zone, Shunyi District,
Beijing 101300
Tel +86 10 80 49 80 00
Fax +86 10 80 49 80 05

FRANCE

Dräger Safety France SAS
3c route de la Fédération,
BP 80141
67025 Strasbourg Cedex 1
Tel +33 3 88 40 59 29
Fax +33 3 88 40 76 67

USA

Dräger Safety, Inc.
101 Technology Drive
Pittsburgh, PA 15275
Tel +1 412 787 83 83
Fax +1 412 787 22 07

MEXICO

Draeger Safety S.A. de C.V.
Av. Peñuelas No. 5
Bodega No. 37
Fraccionamiento Industrial
San Pedrito
Querétaro, Qro México
Tel +52 442 246-1113
Fax +52 442 246-1114

NETHERLANDS

Dräger Safety Nederland B.V.
Edisonstraat 53
2700 AH Zoetermeer
Tel +31 79 344 46 66
Fax +31 79 344 47 90

REP. OF SOUTH AFRICA

Dräger South Africa (Pty) Ltd.
P.O.Box 68601
Bryanston 2021
Tel +27 11 465 99 59
Fax +27 11 465 69 53

SINGAPORE

Draeger Safety Asia Pte Ltd
67 Ayer Rajah Crescent #06-03
Singapore 139950
Tel +65 68 72 92 88
Fax +65 65 12 19 08

SPAIN

Draeger Safety Hispania S.A.
Calle Xaudaró 5
28034 Madrid
Tel +34 91 728 34 00
Fax +34 91 729 48 99

UNITED KINGDOM

Draeger Safety UK Ltd.
Blyth Riverside Business Park
Blyth, Northumberland
NE24 4RG
Tel +44 1670 352 891
Fax +44 1670 356 266