


CO-9X-10 BATTERY POWERED CO ALARM

Sensor type	Advanced electrochemical
Battery type	10 year sealed for life lithium



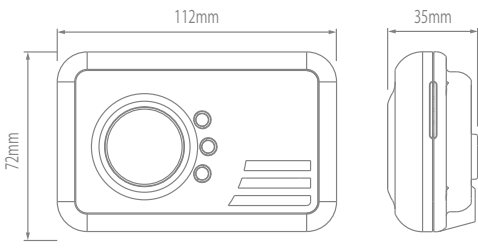
- Advanced electrochemical sensor calibrated and tested in CO gas.
- 10 year sealed for life lithium battery.
- 10 year sensor.
- Can be free-standing or wall mounted.
- Supplied with tamper resistant Fast-Fit bracket with single pin or 2 screw fitting options.
- Test button - to test circuitry and sounder.
- End of Life Indication.



 BS EN50291-1:2010+A1:2012
 BS EN50291-2:2010
 Licence No: KM 551504



Technical Specification

Dimensions	112mm (width) x 72mm (height) 35mm (depth)	
Supply voltage	3V DC	
Battery	10 year sealed for life lithium battery	
Technology	10 year sensor life	
Alarm sound level	85dB(A) at 1m (minimum)	
Installation positions	Wall / Free-standing	
Operating temperature	-10°C to +40°C	
Operating humidity	30% to 90% RH non-condensing	
Storage temperature	-20°C to +60°C	
Storage humidity	Up to 93% RH non-condensing	
Plastic material	ABS, UL94 VO fire retardant	
Warranty	10 years	
Weight	106g	
Certified to	BS EN50291-1:2010+A1:2012 BS EN50291-2:2010	
Independently tested to	N/A	
Maximum number of connected units	N/A	
Operating Frequency	N/A	
Range	N/A	