

RECESSED EXIT SIGN WITH DOWNLIGHT

The MPR Luminaire is a decorative, recessed, edge-illuminated escape route and direction sign for indoor use.

The MPR comprises of a white finished base and is bezel-fitted with a suspended clear legend panel. Cable entry is by a BESA entry in the base and cut-out dimension is 380mm x 120mm. The MPR conforms with the requirements of EN60598-2-22 and is suitable for incorporation into an emergency lighting system complying with BS5266-1:2011. The MPR is a DALI addressable unit. DALI systems perform the necessary scheduled tests in accordance with BS5266, and report back to the central panel with test results.

White as standard but also available in a wide number of alternative finishes, including British Standard or RAL colour, brass, chrome and satin. Switchable, Maintained and Non Maintained versions available.




Viewing Distances 31 Metres

	Mode	Lamp Type	Power Con	Battery	Duration	Weight
MPR8NM	Non Maintained	8W T5	8 VA	2.4V 4Ah	3 Hours	2.56 Kg
MPR8NM/DALI	Non Maintained	8W T5	-	2.4V 4Ah	3 Hours	2.45 Kg
MPR8M	Maintained	8W T5	20 VA	2.4V 4Ah	3 Hours	2.73 Kg
MPR8M/DALI	Maintained	8W T5	-	2.4V 4Ah	3 Hours	2.6 Kg
MPR8/SL	ACDC Slave. * suffix voltage required with 24, 50, 110					
MPR8/230/HF	Mains / Static inverter					

Options

/BR	Brass finish
/CR	Chrome finish
/LR	Arrow left / right
/DS	Double sided legend
/ST	Self Test

Note: All exit signs are arrow down as standard please specify other direction if required

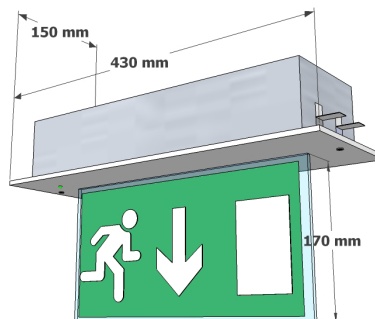

- IP20 (Interior Use)
- DALI addressable
- Recessed Sign
- Hinged Gear Tray
- Ceiling Mounting
- White Finish as Standard
- Brass and Chrome Finishes
- Cut out size 382mm x 122mm

