


Product Data Sheet

Astro Tape

Revision 5 - 15th January 2020

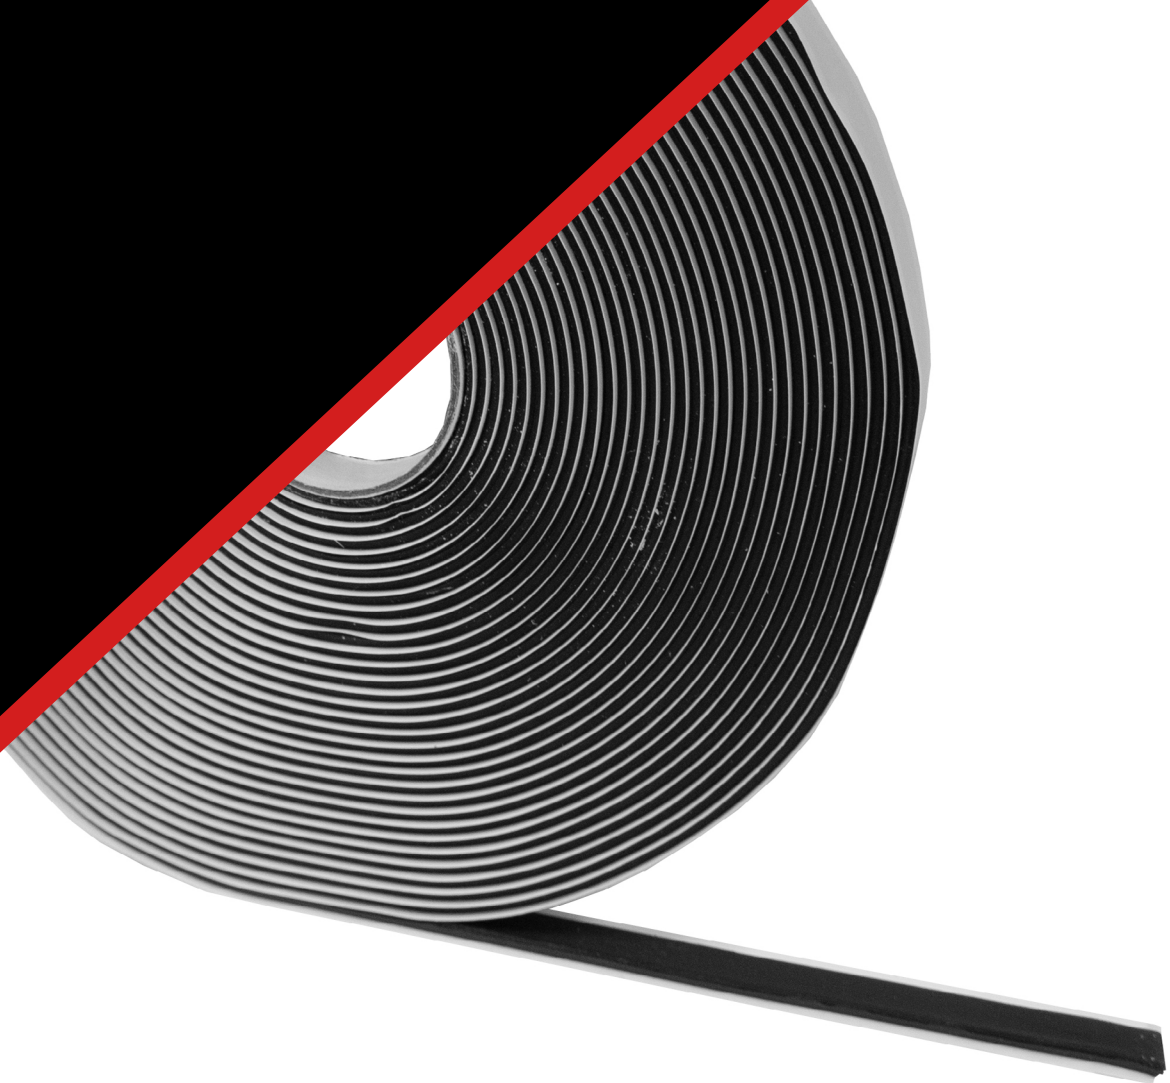

Astro Tape

Intumescent Glazing Tape

- Tested to BS476: Part 22: 1987
- Available in Off-White and Black
- ½ hour Fire Rating
- Easy & Clean Application
- A pliable re-shaped strip that bonds well to Wood & Glass



Product Description

A flexible self adhesive polymer based extruded intumescent material suitable for sealing wired fire resistant glazing into wooden fire doors with a maximum aperture size of 600mm x 600mm.

On exposure to heat from a fire Astroflame Intumescent tape swells, thus prohibiting smoke and flame from passing through the aperture between wood and glass, providing resistance in excess of 1/2 hour.

Supplied in roll form it offers the user a high performance, non load bearing tape for accurate placement, with no waste and requiring no specialist applications.

Product Availability

Available in:- Off-White and Black. 20 rolls per carton.

Product Code	Product Description	Size	Colours
AFIT12W	Astro Tape	12mm x 3mm x 15mtr	Off-White
AFIT12BLK	Astro Tape	12mm x 3mm x 15mtr	Black

To Order & Specify

Please contact us and quote the following information -
Quantity / Product Code / Product Description / Size / Colour
Typical example:- 10 / AFIT12W / Astro Tape / 12mm x 3mm x 15mtr / Off-White

>> Tel: [01329 844 500](tel:01329844500) or >> Email: sales@astroflame.com

Installation

Please see installation sheet - This can be requested from our sales team T: [01329 844 500](tel:01329844500)
or E: sales@astroflame.com

Health and Safety

Please see (SDS) Safety Data sheet - This can be requested from our sales team T: [01329 844 500](tel:01329844500)
or E: sales@astroflame.com

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME (FIRE SEALS) LTD has no control over the specific application or installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product based on the products limitation of applications and that the product is fit for purpose for their intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROFLAME (FIRE SEALS) LTD, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice. If you are in any doubt as to the suitability of this product for your intended application please contact our technical team on 01329 844500 or email sales@astroflame.com and we will contact you.