


FireAngel

W2-CO-10XT

Wireless Carbon Monoxide Alarm with 10 year Lithium Battery



Wi-Safe[®] 2

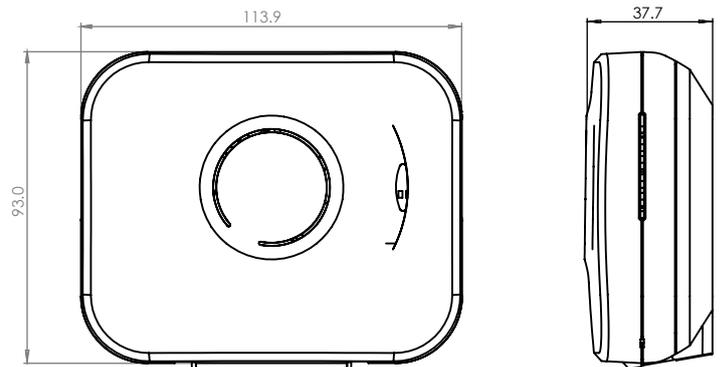

Weight: 186g

Product Features

- Sealed for life, tamper resistant, 10 year lithium battery.
- No fuss - quick and simple installation.
- Single pin fitting option.
- Mixed system compatibility:
Wireless and hardwired*.
AC and DC.
- Wirelessly interlink up to 50 Wi-Safe 2 smoke, heat, CO alarms and accessories on a single network.
- Resistant to false alarms caused by normal household contaminants.
- End of life indication.

Technical Specification

Supply Voltage	3V DC sealed lithium battery
Technology	Wi-Safe 2
Alarm sound level	85dB (A) at 3m (minimum)
Installation positions	Wall / Freestanding
Operating temperature	-10°C to +40°C
Operating humidity	30% to 90% RH non-condensing
Storage temperature	-20°C to +60°C
Storage humidity	30% to 90% RH non-condensing
Plastic material	UL94 V0 Flame Retardant
Warranty	5 years
Master pack quantity	10
Approvals	BS EN 50291-1 & 2: 2010 / CE / ETSI EN 300 220-2 V2.3.2 (2010-02) / EN300489-1 &-3 / EN300220-2 - Radio
Operating Frequency	868 MHz
Max No. of connected units (network)	50 units
Networking	Multi-directional communication
Range	35m (over 200m in clear air)



EN 50291-1: 2010
EN 50291-2: 2010
KM 551504