UNION CE Range

CE3F

Fixed Size 3 Rack and Pinion Door Closer



Application:

- Introducing the new CE3F fixed size 3 rack and pinion door closer.
- The only door closer in its class CE Marked in all 3 positions for timber and metal fire doors.
- Click here to view the video
- 10 year guarantee remarkably robust yet provides incredible value for money.
- Everything included spplied with all components required to install safely in all three mounting positions.
- Easy to install:
 - Quick and easy fitting process with specific template for each mounting position, to prevent mistakes.
 - Uses same footprint and fixing dimensions as most popular UK door designs – can beeasily retro fitted with minimum effect.
 - Non-handed design which provides flexibility reducing the amount of parts stocked.
- Easy to adjust adjustable arm allows the CE3F to be easily installed and adjusted in multiple applications.
- Easy to set up side mounted door speed and latch controls for convenient access – allowing easy and accurate set up of the door opening and closing.

Specification:

- Fixed size 3 rack and pinion door closer.
- Maximum door width 950mm EN size 3.
- 130° maximum angle of opening (controlled closing).
- Adjustable closing speed from 130° open to 15° open.
- Adjustable latch action for final 15°.
- Adjustable arm set for regular, transom and parallel arm installation.
- Additional bracket included for parallel arm mounting.






EN 1154 Size	Max Leaf Width	Max Leaf weigh
1	750mm	20kg
2	850mm	40kg
3	950mm	60kg
4	1100mm	80kg
5	1250mm	100kg
6	1400mm	120kg

Standards:

 CE Marked to EN 1154 in all 3 mounting positions.



- Fire rated for timber (FD120) and metal (FD240) fire doors
- · Certifire approved.









Finish:

 Silver finish, which allows it to blend in with any application where other traditional door closers are installed.


UNION CE Range

CE3F

Fixed Size 3 Rack and Pinion Door Closer



Technical Design:

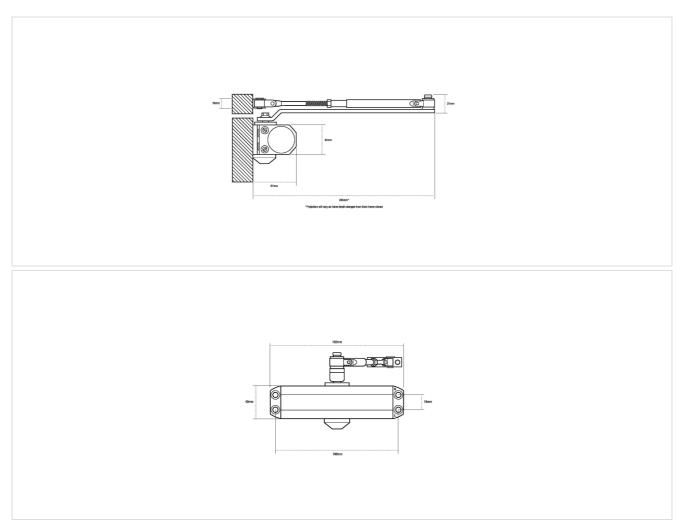

Variants:

Code	Description
J-CE3F-SIL	UNION CE Marked Fixed Size 3 R&P Closer SIL