


The CO850MRLi carbon monoxide alarm is a 230V mains powered alarm and uses the latest in electrochemical sensing technology. Tamper-proof rechargeable lithium cells give reliable back up for at least 6 months with alarm in standby mode. Up to 12 compatible carbon monoxide alarms can be linked for simultaneous warning.

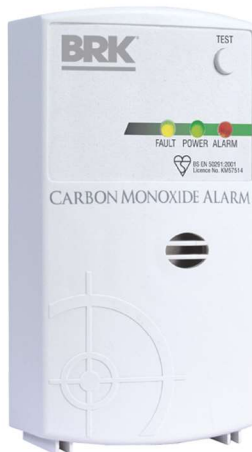

Product features:

- 230V mains powered
- Rechargeable lithium battery back-up
- Instant test/ reset feature
- Interlink up to 12 alarms
- Power, alarm and fault indicators
- 5 year guarantee
- BS EN 50291-1: 2010

Model number	CO850MRLi
Description	230V CO alarm with lithium battery back-up
Technology	Electrochemical sensing technology
Sensitivity	Low set point of 50ppm
Alarm sound level	85db at 1m
Battery type	Rechargeable lithium battery back-up
Operation AC/DC	AC
Installation positions	Wall
Operating temperature	-10°C to +40°C
Operating humidity	30% to 90% relative
Storage temperature	0°C to + 40°C
Storage humidity	30% to 90% relative
Warranty	5 years

Dimensions	134mm (H) x 69mm (W) x 60mm (D)
Unit weight	226g
Pack dimensions	135mm (H) x 80mm (W) x 74mm (D)
Pack weight	283g
Master pack quantity	10
Master pack dimensions	151mm (H) x 172mm (W) x 386mm (D)
Master pack weight	2.83kg
Pack barcode	00029054019936
Outer barcode	10029054019933
Approvals	BS EN 50291-1: 2010